

RAPIDO

Fleksibilni crijep u mega formatu

- Markantan tradicionalni model velikog XXL formata
- Izuzetna fleksibilnost i jednostavna ugradnja zahvaljujući velikom pomičnom području od 44 mm
- Najbolji omjer cijene i kvalitete s cca. 8,1 kom/m²
- Potporna rebra poboljšavaju statiku i odvod eventualne kondenzirane vode
- „Tehnikom labirint“ s pet posebno oblikovanih i dodatno naglašenih bočnih rebara sprječava se prodor kišnice čak i kod jakog vjetrova.



TEHNIČKI PODACI

Dimenzije(cca.)	325 x 502 mm (milimetar)
Min.pokrovna širina(cca.)	277 mm (milimetar)
Srednja pokrovna širina(cca.)	278 mm (milimetar)
Maks.pokrovna širina(cca.)	280 mm (milimetar)
Min.letvanje(cca.)	410 mm (milimetar)
Letvanje preporučeno(cca.)	425 mm (milimetar)
Maks. letvanje(cca.)	440 mm (milimetar)
min. utrošak crijeva (cca.)	8.1 kom/m ² (komada po metru kvadratnom)
Utrošak crijeva prosječno(cca.)	8.4 kom/m ² (komada po metru kvadratnom)
Maks.utrošak crijeva	8.8 kom/m ² (komada po metru kvadratnom)
Masa po komadu(cca.)	5.2 kg/kom (kilograma po komadu)
Masa po m ² (cca.)	43.7 kg/m ² (kilogram po metru kvadratnom)
Masa palete(cca.)	899 kg (kilogram)
BETON I VLAKNO CEMENT	4 kom (komad)
Komada na paleti	168 komad




LAF-/FLA VRIJEDNOSTI

LAF-/FLA VRIJEDNOSTI U MM SA FALCOM ZA 30X50 LETVE											
DN	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	
LAF	75	70	70	65	60	60	60	60	60	60	55
FLA	110	95	85	75	65	60	50	35	30	30	


LAF-/FLA VRIJEDNOSTI U MM SA FALCOM ZA 40X60 LETVE											
DN	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	
LAF	75	70	70	60	55	55	55	50	45	40	
FLA	120	105	95	85	75	70	60	45	40	20	

LAF-/FLA VRIJEDNOSTI U MM SA FALCOM ZA 50X50 LETVE											
DN	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	
LAF	70	65	65	55	50	45	45	40	35	30	
FLA	125	115	105	95	85	85	75	60	60	50	



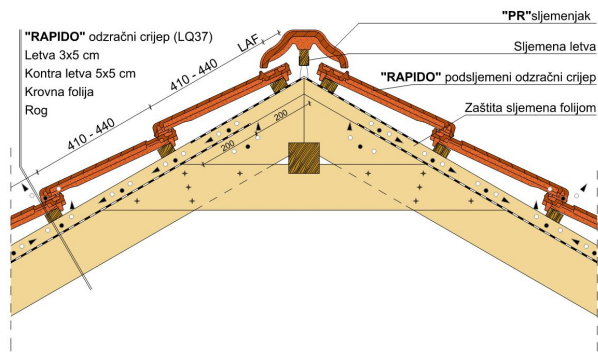


Sljeme 1

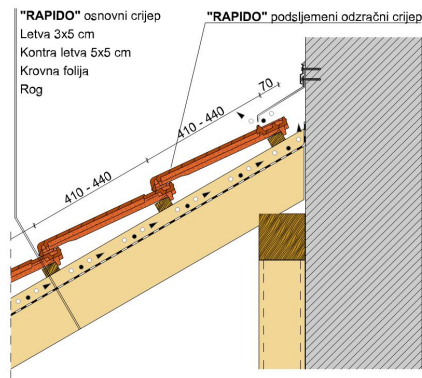


Spoj krova i zida



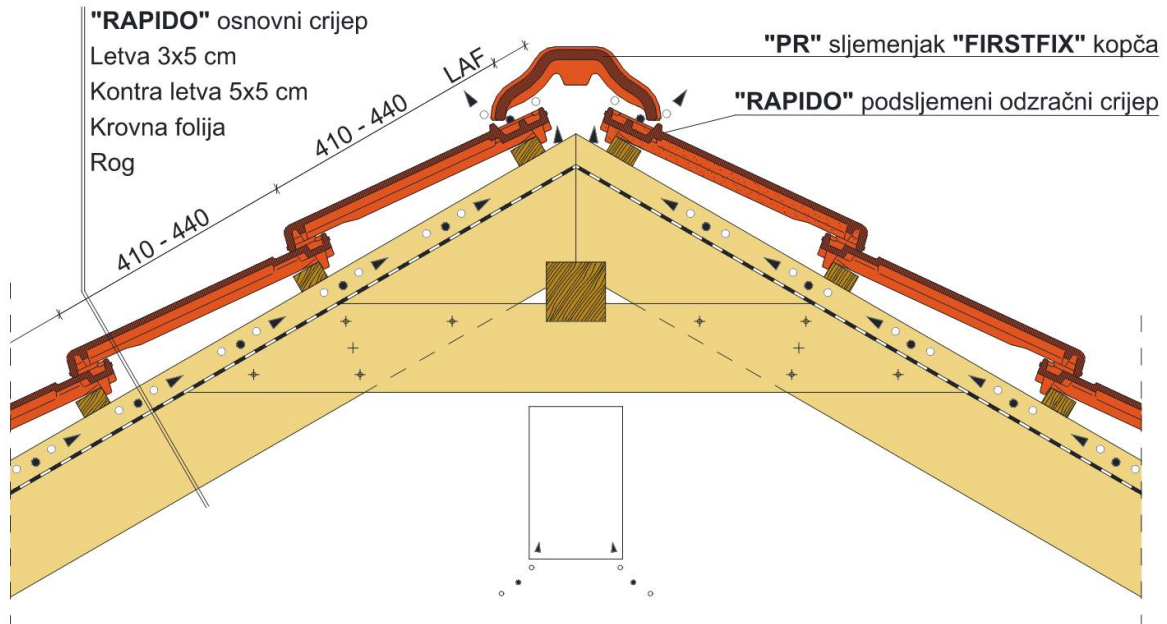


Sljeme 2

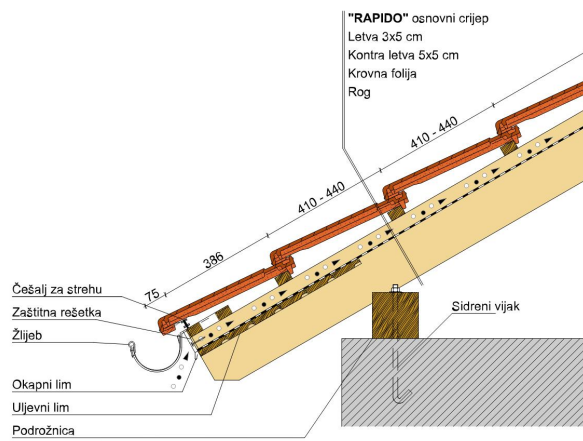


Streha 1



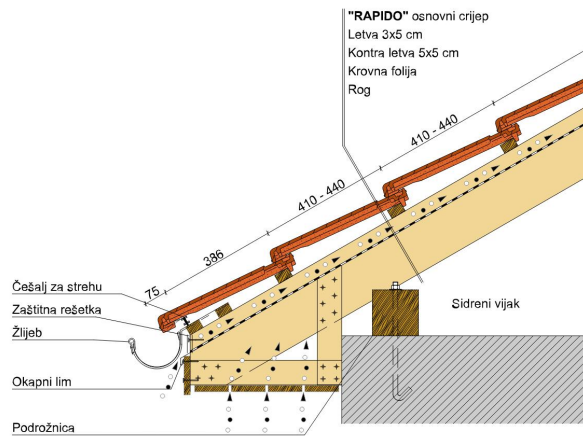


Streha 2

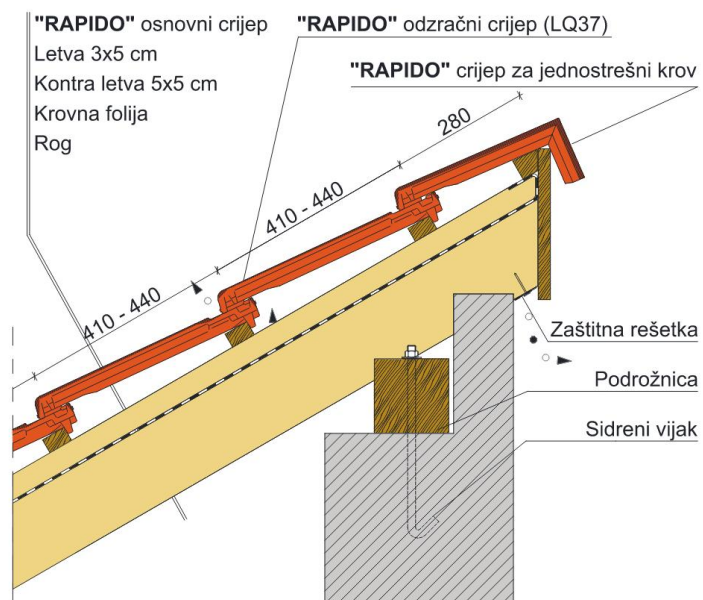


Jednostresni krov



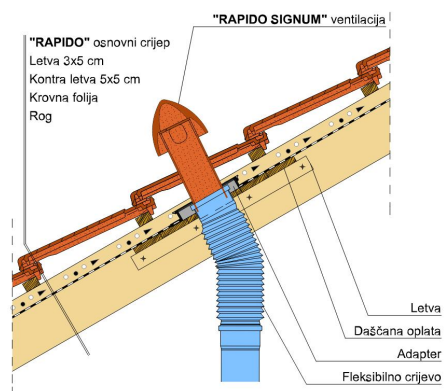

Signum

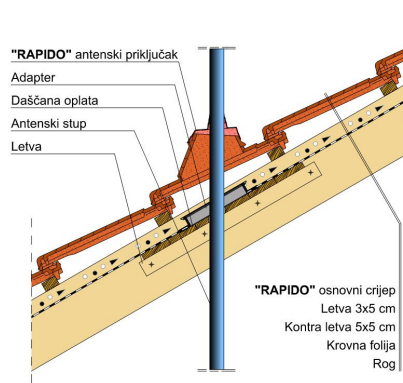

Antena



